



RESIN-ENHANCED WAX

For Flathead Printers

GP725

Resin-enhanced wax. Capable and versatile.

Recommending a ribbon



GP725 gives outstanding performance on a wide variety of labelling applications. This premium resin-enhanced wax offers sharp, black and durable prints, even at speeds as high as 300 mm/s (12 IPS).

GP725 is optimised for a wide range of energy settings, making it easy to replace other wax ribbons without adjusting printer heat settings. A state-of-the-art back coating extends print head life and reduces build-up which ensures labels and images are clear and consistently readable.

GP725's anti-static properties make it an ideal choice for RFID overprint applications. ISEGA approval of GP725 guarantees safe use for food packaging applications.

Benefits

- Super-black bar codes, text and graphics
- Easy to use, no printer adjustments needed
- Unbeatable performance at high printing speeds
- Prints on a wide range of stocks
- Good durability
- Anti-static for increased print head protection and RFID applications
- Guardian2 back coat extends print head life

Applications

- General purpose
- Shipping, warehousing and receiving
- Shelf and bin
- Retail tag and label
- Apparel ticketing
- Compliance
- Food packaging

Technical Specifications

Colour Code Tab Clear
 Maximum Print Speed ... 12 IPS
 Film Thickness 4.5 µ
 Total Ribbon Thickness ... 8.6 µ
 Transmission Density2.7
 MacBeth Scale
 Ink Melting Point.....65°C
 Storage Condition
 -5 ° to 40 ° C
 20 % to 85 % Humidity


Sample GP725 Ribbons

Part # CES11075 –
110mm x 50m – CSI


Part # CES11074 –
110mm x 50m – CSO

Performance

Coated Papers

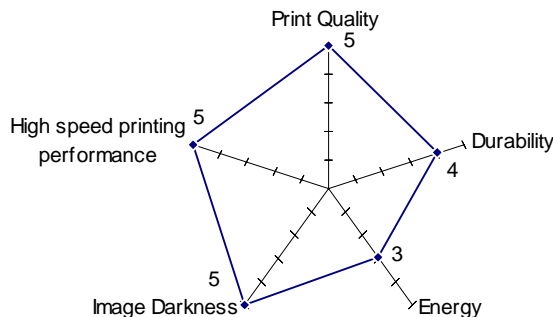

Vellum

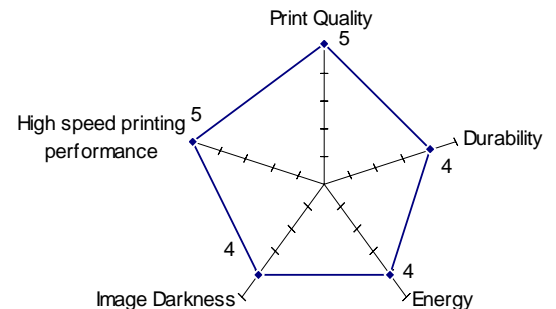

Isega Approved Product

